

CEMPARGE

PHYSICAL TERMITE BARRIER

CEMPARGE IS A CEMENTITIOUS TERMITE PROOF COATING THAT WILL STOP TERMITES ENTERING MASONRY WALLS & STRUCTURES.

20 YEAR WARRANTY 50 YEAR MINIMUM LIFE EXPECTANCY



CEMPARGE APPLICATION



CEMPARGE RETAINING WALL



CEMPARGE TILT PANEL GROUT



CEMPARGE KNOCK OUT BLOCK SYSTEM



CEMPARGE COLLAR APPLICATION



CEMPARGE CONCRETE REPAIR


NO POISONS

EASY TO INSTALL

LOW COST SYSTEM

COMPLIES WITH AS3660 TERMITE CODE



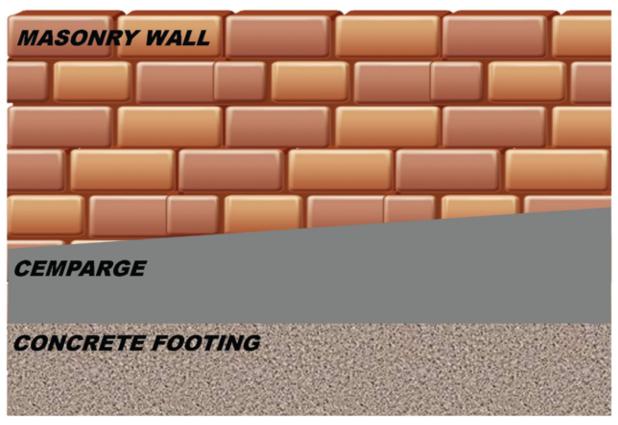

In Sub-Ground
& cut fill
situation
Cemparge
applied in
areas requiring
minimum
75mm visible
inspection
zones

FEATURES OF CEMPARGE

- No need for separate barriers or systems using poisons
- Complies with AS 3660.1 & 3—2000 (Termite Code), AS 3700 (Masonry Code)
- CSIRO Building Products & Systems Appraisal Technical Assessment Number 239
- Complies with DPC AS/NZS 2904:Damproof Courses & Flashings
- Approved by Queensland Project Services
- Available in 20kg Part A Powder & 5ltr Part B Liquid
- · Mixed on site & applied in 2 coats by soft broom
- Can be used in engaged piers, filling in extruded brick holes
- · Cemparge is "NON-TOXIC" as well as no maintenance
- Approved termite proof render for retaining walls & landscape areas
- Sliding door sill areas easily termite proofed
- Post construction quality assurance system
- No holes or voids are left in the Cemparge coatings
- Installation & product warranty
- Suitable as construction grout for Tilt Slab panel construction
- Pipe collars are installed by a qualified pest manger who provides certification
- Suitable termite proofing for Hebel & other lightweight wall panelling systems

Your Local Alterm Supplier



75 Lambton Rd (PO Box 247) Broadmeadow NSW 2292

Phone: (02) 4969 8055 Mobile: 0413 598 607 Fax: (02) 4940 8400 Web: www.alterm.com.au

Email: sales@alterm.com.au